



UMR-AA SERIES

125 to 6000V, 4 to 30W
Standard DC/DC Modules



Features

- Biasing High Voltage Power Supplies
- Regulated Output Voltage from V_{OUT} Max to True Zero
- Wide Input Voltage Range
- Low Ripple
- Indefinite Output Short Circuit Protection
- Output Voltage and Current Monitors
- Fixed-Frequency, Low-Stored-Energy Design
- UL/cUL Recognized Component; CE Mark (LVD and RoHS)

Specifications

		Conditions			Value	Units
Input		4W	20W	30W		
Voltage	Nominal	+12	+24	+24		VDC
Voltage Range	Full Power	+11 to 16	+23 to 30	+23 to 30		VDC
Voltage Range	Derated Power Range	+10 to 32	+10 to 32	+10 to 32		VDC
Current	Standby/Disable	<80	<80	<80		mA
Current	No Load, Max V_{OUT}	<150	<150	<150		mA
Current	Full Load, Max V_{OUT}	<500	<1000	<1500		mA
AC Ripple Current	Nominal Input, Full Load	<100	<100	<100		mAp-p
Output						
Static Load Regulation	No Load to Full Load, Max V_{OUT}	<0.01				%VDC
Line Regulation	Nominal Input, Max V_{OUT} , Full Power	<0.08				%VDC
Stability	30-minute warmup, per 8h/per day	<0.01 / <0.02				%VDC
Programming & Controls						
Input Impedance	Nominal Input, Positive Models	1.0 to Signal Ground				M Ω
	Nominal Input, Negative Models	0.01 to V_{REF}				
Adjust Resistance	Typical Potentiometer Values	10K to 100K (Pot Across V_{REF} and Signal Ground, Wiper to Adjust)				Ω
Adjust Logic (V_{ADJ}) ¹	Positive Models	0 to +4.64 = 0 to 100% Rated Output				VDC
	Negative Models	+5 to +0.36 = 0 to 100% Rated Output				
Reference Voltage (V_{REF})	Temperature +25°C	+5 \pm 0.5%				VDC
Enable/Disable HV_{OUT}	-	Unconnected = Enabled Ground to +0.5 = Disabled; +2.4 to 32 = Enabled				VDC
Environmental						
Operating Temperature ²	Case Temperature, Full Load, Max V_{OUT}	-40 to +65				°C
Temperature Coefficient	Over the Specified Temperature	\pm 50 (\pm 25 Optional)				PPM/°C
Thermal Shock	Mil-Std-810, Method 503-4, Proc. II	-40 to +65				°C
Storage Temperature	Non-Operating, Case Temperature	-55 to +105				°C
Humidity	All Conditions, Standard Package	0 to 95% Non-Condensing				-
Altitude	All Conditions, Standard Package	Sea Level through Vacuum				-
Shock	Mil-Std-810, Method 516.5, Proc IV	20				G
Vibration	Mil-Std-810, Method 514.5, Fig 514.5C-3	10				G

¹V05 or V10 Options (additional details on pg.5)

²Typically, convection cooled. Units operating at full power might require additional cooling to maintain case temperature below 65°C. Damage to the power supply may occur if not appropriately cooled during use.



UMR-AA SERIES

Part Number ³	Output Voltage VDC	Output Current mA	High Freq. Ripple ⁴ %Vp-p	Output Capacitance μ F	I _{MON} Scaling ⁵ mA/V	V _{MON} Scaling ⁶ V
4W Models						
UMR-AA-125*-4	0 to 125	32.00	0.029	1.0000	11.640	10:1 \pm 2%
UMR-AA-250*-4	0 to 250	16.00	0.010	1.0000	3.270	10:1 \pm 2%
UMR-AA-500*-4	0 to 500	8.00	0.007	0.0500	0.790	10:1 \pm 2%
UMR-AA-1000*-4	0 to 1000	4.00	0.028	0.0100	0.370	100:1 \pm 2%
UMR-AA-2000*-4	0 to 2000	2.00	0.015	0.0050	0.192	100:1 \pm 2%
UMR-AA-4000*-4	0 to 4000	1.00	0.015	0.0050	0.090	100:1 \pm 2%
UMR-AA-6000*-4	0 to 6000	0.67	0.021	0.0033	0.066	100:1 \pm 2%
20W Models						
UMR-AA-125*-20	0 to 125	160.0	0.040	8.9000	258.000	10:1 \pm 2%
UMR-AA-250*-20	0 to 250	80.0	0.021	1.0000	72.700	10:1 \pm 2%
UMR-AA-500*-20	0 to 500	40.0	0.019	1.0000	17.650	10:1 \pm 2%
UMR-AA-1000*-20	0 to 1000	20.0	0.048	0.0500	4.620	100:1 \pm 2%
UMR-AA-2000*-20	0 to 2000	10.0	0.026	0.0100	1.520	100:1 \pm 2%
UMR-AA-4000*-20	0 to 4000	5.0	0.030	0.0050	0.760	100:1 \pm 2%
UMR-AA-6000*-20	0 to 6000	3.3	0.039	0.0033	0.500	100:1 \pm 2%
30W Models						
UMR-AA-125*-30	0 to 125	240.0	0.040	8.9000	258.000	10:1 \pm 2%
UMR-AA-250*-30	0 to 250	120.0	0.033	1.0000	72.700	10:1 \pm 2%
UMR-AA-500*-30	0 to 500	60.0	0.020	1.0000	17.650	10:1 \pm 2%
UMR-AA-1000*-30	0 to 1000	30.0	0.048	0.0500	4.620	100:1 \pm 2%
UMR-AA-2000*-30	0 to 2000	15.0	0.036	0.0100	1.520	100:1 \pm 2%
UMR-AA-4000*-30	0 to 4000	7.5	0.036	0.0050	0.760	100:1 \pm 2%
UMR-AA-6000*-30	0 to 6000	5.0	0.045	0.0033	0.500	100:1 \pm 2%

³For "*", substitute "P" for positive output or "N" for negative output

⁴1Hz to 1MHz

⁵Full Scale Signal


⁶Into 10M Ω Meter for Models with Y05 Option and F Option.

Options

Append to Part #	Option Description	Not Compatible With
-V05	Enhanced Controls and Monitors, 0 to +5VDC	V10
-V10	Enhanced Controls and Monitors, 0 to +10VDC	V05, 4W models
-H	Aluminum Heat Sink	E
-T	\pm 25PPM/ $^{\circ}$ C Temperature Coefficient ⁷	-
-M	Mu-Metal Shielding Over Case	-
-E	Eared Mounting Plate	H

⁷Operating Temperature is +10 to +45 $^{\circ}$ C.

Mechanical Drawings and Pin Assignments

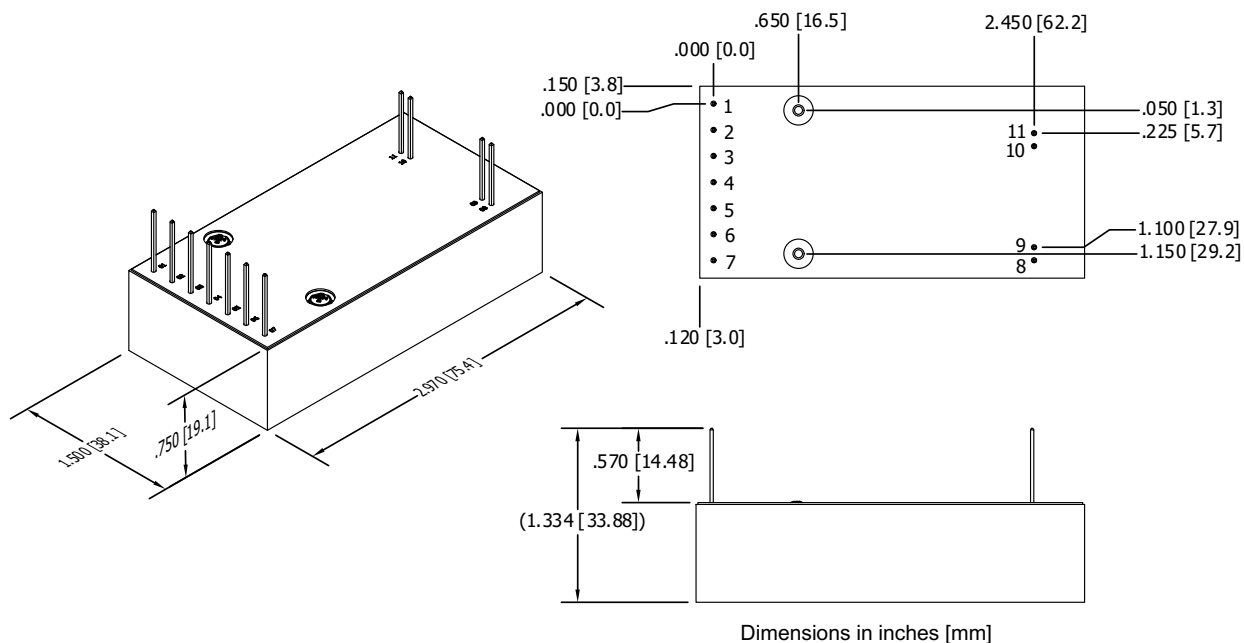

Mechanical Specifications	
Volume	3.35in ³ [54.8cm ³]
Weight	4.0oz [114g]
Case	DAP case certified to ASTM-D-5948
Pins	Pins 1-7 0.200in Spacing Pins 8-9, 10-11 0.100in Spacing

Tolerances	
Overall	0.050in [±1.27mm]
Pin to Pin	0.015in [±0.38mm]
Mounting	0.025in [±0.64mm]

Pin Assignments & Connections		
Pin 1	PWRGND ⁸	Input Power Ground Return
Pin 2	+VIN	Positive Power Input
Pin 3	IMON ⁸	Output Current Monitor
Pin 4	ENABLE	Enable/Disable
Pin 5	SIGGND	Signal Ground Return
Pin 6	VADJ ⁸	Voltage Adjust
Pin 7	VREF	Voltage Reference
Pin 8	HVRTN	High Voltage Ground Return
Pin 9	VMON	Output Voltage Monitor
Pin 10, 11	HVOUT	High Voltage Output


⁸PWRGND may be labelled -VIN, IMON as IOUT, and VADJ as RMTADJ on some models.

Certifications and Compliances



V05 and V10 Options

Conditions		Value	Units
Output			
Current Scaling (I_{MON})	V05 Option, Buffered Signal	0 to +5 = 0 to 100% Rated Output	VDC
	V10 Option, Buffered Signal	0 to +10 = 0 to 100% Rated Output	
Voltage Scaling (V_{MON})	V05 Option, Buffered Signal	0 to +5 = 0 to 100% Rated Output	VDC
	V10 Option, Buffered Signal	0 to +10 = 0 to 100% Rated Output	
Programming & Controls			
Adjust Logic (I_{ADJ} & V_{ADJ})	V05 Option	0 to +5 = 0 to 100% Rated Output	VDC
	V10 Option	0 to +10 = 0 to 100% Rated Output	
Reference Voltage (V_{REF})	V05 Option	+5 \pm 0.5%, 10mA Source	VDC
	V10 Option	+10 \pm 0.5%, 30mA Source	
Enable/Disable HV_{OUT}	-	Unconnected = Disabled; Ground to +0.5 = Disabled; +2.4 to 32 = Enabled	VDC
Mode Indicator	IMODE	Open Drain, Pulled Low When Active, 0 to 60V and 100mA Max	-
	VMODE	Open Drain, Pulled Low When Active, 0 to 60V and 100mA Max	

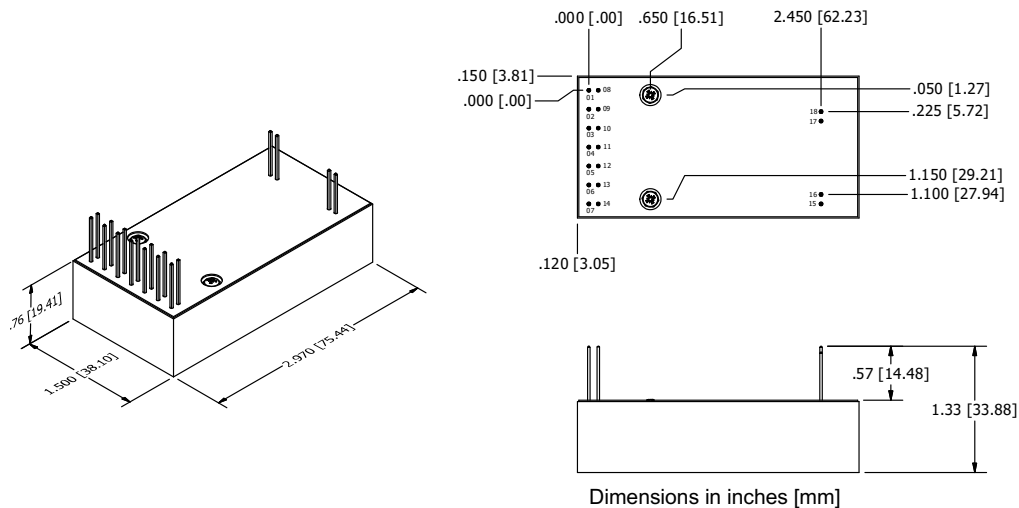

Mechanical Specifications	
Volume	3.35in ³ [54.8cm ³]
Weight	4.0oz [114g]
Case	DAP case certified to ASTM-D-5948
Pins	Pins 1-7, 8-14 0.200in Spacing
	Pins 15-16, 17-18 0.100in Spacing

Tolerances	
Overall	0.050in [\pm 1.27mm]
Pin to Pin	0.015in [\pm 0.38mm]
Mounting	0.025in [\pm 0.64mm]

Pin Assignments & Connections		
Pin 1, 8	PWRGND ⁹	Input Power Ground Return
Pin 2, 9	+VIN	Positive Power Input
Pin 3	IMON	Output Current Monitor
Pin 4	ENABLE	Enable/Disable
Pin 5	SIGGND	Signal Ground Return
Pin 6	VADJ	Voltage Adjust
Pin 7	VREF	Voltage Reference
Pin 10	N/C	N/C
Pin 11	IMODE	Current Mode Indicator
Pin 12	VMODE	Voltage Mode Indicator
Pin 13	IADJ	Current Adjust
Pin 14	VMON	Output Voltage Monitor
Pin 15, 16	HVRTN	High Voltage Ground Return
Pin 17, 18	HVOUT	High Voltage Output

⁹PWRGND may be labelled -VIN on some models.