




UMR-BPC SERIES

±125 to ±6000V, 120 to 250W
Standard DC/DC Modules

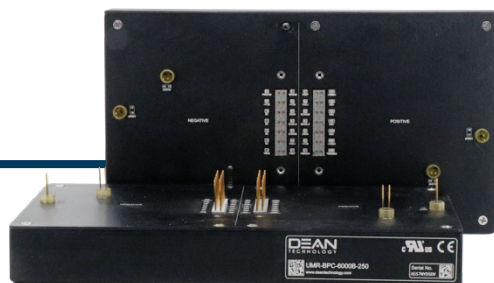

Features

- Capacitor Charging High Voltage Power Supplies
- Regulated Bipolar (\pm) Output Voltage from V_{OUT} Max to True Zero
- Wide Input Voltage Range
- Indefinite Output Short Circuit Protection
- Output Voltage and Current Monitors
- Fixed-Frequency, Low-Stored-Energy Design
- Designed for Continuous Output Power
- UL/cUL Recognized Components; CE Mark (LVD and RoHS)

Specifications

		Conditions		Value	Units
Input		120W	250W		
Voltage	Nominal	+24	+24		VDC
Voltage Range	Full Power	+23 to 30	+23 to 30		VDC
Voltage Range	Derated Power Range	+10 to 32	+10 to 32		VDC
Current	Standby/Disable, Each Side	<90	<90		mA
Current	No Load, Max V_{OUT} , Each Side	<500	<500		mA
Current	Max Load, Max V_{OUT} , Each Side	<3205	<6300		mA
AC Ripple Current	Nominal Input, Full Load, Each Side	<150	<200		mAp-p
Output					
Static Load Regulation	No Load to Full Load, Max V_{OUT}	<0.01			%VDC
Line Regulation	Nominal Input, Max V_{OUT} , Full Power	<0.08			%VDC
Stability	30-minute warmup, per 8h/per day	<0.01 / <0.02			%VDC
High Frequency Ripple	Full Load, 1Hz to 1MHz, Max E_{OUT}	<1.00			%Vp-p
Programming & Controls					
Input Impedance	Nominal Input, Positive Models	1.0 to Signal Ground			M Ω
	Nominal Input, Negative Models	0.01 to V_{REF}			
Adjust Resistance	Typical Potentiometer Values	10K to 100K (Pot Across V_{REF} and Signal Ground, Wiper to Adjust)			Ω
Adjust Logic (V_{ADJ})¹	Positive Models	0 to +4.64 = 0 to 100% Rated Output			VDC
	Negative Models	+5 to +0.36 = 0 to 100% Rated Output			
Reference Voltage (V_{REF})	Temperature +25°C	+5 \pm 0.5%			VDC
Enable/Disable HV_{OUT}	-	Unconnected = Enabled; Ground to +0.5 = Disabled; +2.4 to 32 = Enabled			VDC
Environmental					
Operating Temperature²	Case Temperature, Full Load, Max E_{OUT}	-40 to +65			°C
Temperature Coefficient	Over the Specified Temperature	\pm 50			PPM/°C
Thermal Shock	Mil-Std-810, Method 503-4, Proc. II	-40 to +65			°C
Storage Temperature	Non-Operating, Case Temperature	-55 to +105			°C
Humidity	All Conditions, Standard Package	0 to 95% Non-Condensing			-
Altitude	All Conditions, Standard Package	Sea Level through Vacuum			-
Shock	Mil-Std-810, Method 516.5, Proc IV	20			G
Vibration	Mil-Std-810, Method 514.5, Fig 514.5C-3	10			G

¹V05 or V10 Option (additional details on pg.5)

²Typically, convection cooled. Units operating at full power might require additional cooling to maintain case temperature below 65°C. Damage to the power supply may occur if not appropriately cooled during use.




UMR-BPC SERIES

Part Number	Output Voltage ±VDC	Output Current mA	Output Capacitance µF	I _{MON} Scaling ³ mA/V	V _{MON} Scaling ⁴
120W Models					
UMR-BPC-125B-120	0 to 125	480	2.2000	400.0	100:1 ±1%
UMR-BPC-250B-120	0 to 250	240	1.0000	200.0	100:1 ±1%
UMR-BPC-500B-120	0 to 500	120	0.3300	109.0	100:1 ±1%
UMR-BPC-1000B-120	0 to 1000	60	0.1500	50.0	100:1 ±1%
UMR-BPC-2000B-120	0 to 2000	30	0.1500	26.0	100:1 ±1%
UMR-BPC-4000B-120	0 to 4000	15	0.1000	11.5	100:1 ±1%
UMR-BPC-6000B-120	0 to 6000	10	0.0066	6.2	100:1 ±1%
250W Models					
UMR-BPC-125B-250	0 to 125	1000	2.2000	833.0	100:1 ±1%
UMR-BPC-250B-250	0 to 250	500	1.0000	417.0	100:1 ±1%
UMR-BPC-500B-250	0 to 500	250	0.3300	208.0	100:1 ±1%
UMR-BPC-1000B-250	0 to 1000	125	0.1500	114.0	100:1 ±1%
UMR-BPC-2000B-250	0 to 2000	62	0.1500	52.0	100:1 ±1%
UMR-BPC-4000B-250	0 to 4000	31	0.1000	26.0	100:1 ±1%
UMR-BPC-6000B-250	0 to 6000	21	0.0066	17.7	100:1 ±1%

³Full Scale Signal

⁴Into 10MΩ

Rise Time/Capacitor Charging

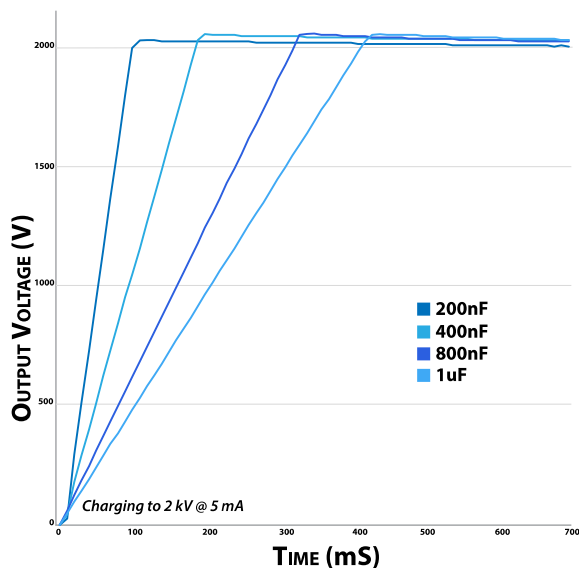

Typical Rise Time:


$$t_R = \frac{C + C_{ext}}{I_o} V_o$$

Minimum Rise Time is 10nS

Abbreviations:

- C Output Capacitance of Power Supply
- C_{ext} Capacitance of External Capacitor
- V_O Power Supply Output Voltage
- F Power Supply Discharge Frequency
- I_o Nominal Output Current
- t_R Rise Time

Mechanical Drawings and Pin Assignments

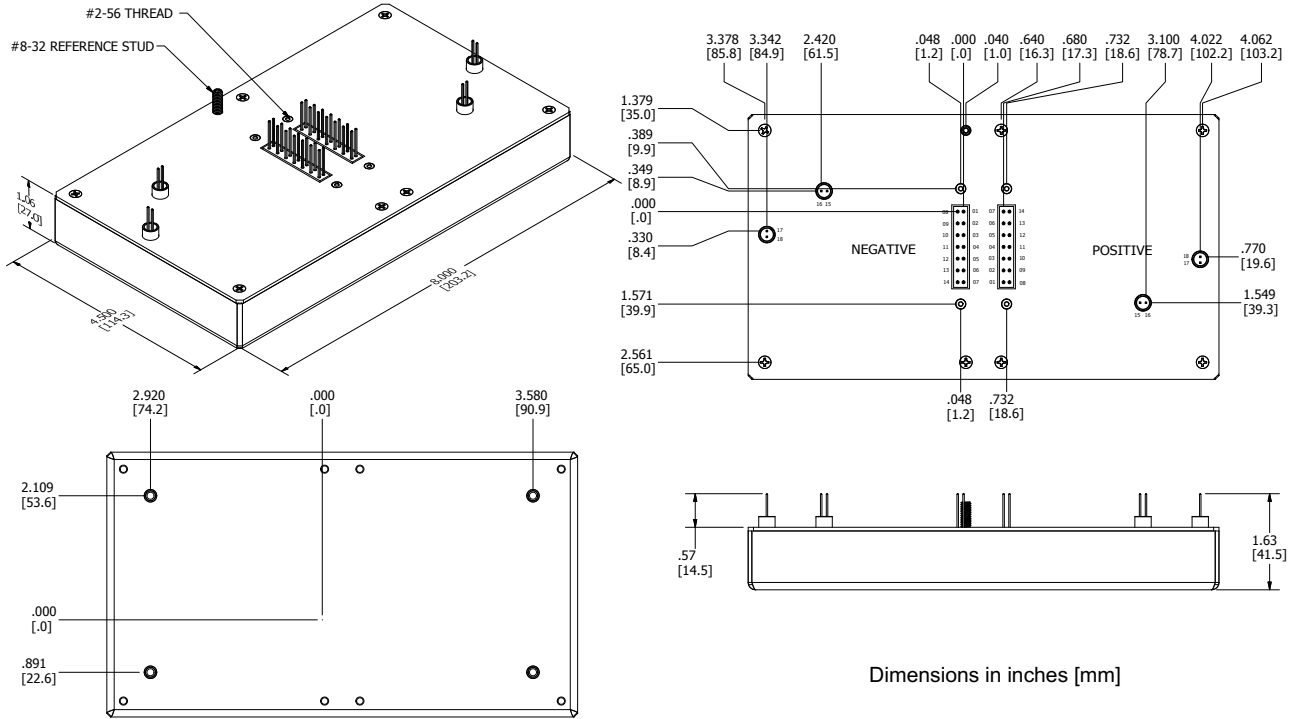

Mechanical Specifications	
Volume	38.7in ³ [634cm ³]
Weight	42oz [1200g]
Case	Aluminum Anodized
Pins	Pins 1-7, 8-14 0.200in Spacing Pins 15-16, 17-18 0.100in Spacing

Tolerances	
Overall	0.050in [±1.27mm]
Pin to Pin	0.015in [±0.38mm]
Mounting	0.025in [±0.64mm]

Pin Assignments & Connections ⁵		
Pin 1,8	PWRGND	Input Power Ground Return
Pin 2,9	+VIN	Positive Power Input
Pin 3	IMON	Output Current Monitor
Pin 4	ENABLE	Enable/Disable
Pin 5	SIGGND	Signal Ground Return
Pin 6	VADJ	Voltage Adjust
Pin 7	VREF	Voltage Reference
Pin 10	N/C	N/C
Pin 11	N/C	N/C
Pin 12	N/C	N/C
Pin 13	N/C	N/C
Pin 14	VMON	Output Voltage Monitor
Pin 15, 16	HVRTN	High Voltage Ground Return
Pin 17, 18	HVOUT	High Voltage Output

⁵Pin Assignments applicable to both sides of the power supply.

Options

Append to Part #	Option Description	Not Compatible With
-V05	Enhanced Controls and Monitors, 0 to +5VDC	V10
-V10	Enhanced Controls and Monitors, 0 to +10VDC	V05
-H	Aluminum Heat Sink, 0.500in H	SS
-ST	Standoffs on Top of Cover, PCB Support	-
-SS	Threaded Studs for Mounting (#8-32x0.75)	H



UMR-BPC SERIES

V05 and V10 Options

Conditions		Value	Units
Output			
Current Scaling (I_{MON})	V05 Option, Buffered Signal	0 to +5 = 0 to 100% Rated Output	VDC
	V10 Option, Buffered Signal	0 to +10 = 0 to 100% Rated Output	
Voltage Scaling (V_{MON})	V05 Option, Buffered Signal	0 to +5 = 0 to 100% Rated Output	VDC
	V10 Option, Buffered Signal	0 to +10 = 0 to 100% Rated Output	
Programming & Controls			
Adjust Logic (V_{ADJ})	V05 Option	0 to +5 = 0 to 100% Rated Output	VDC
	V10 Option	0 to +10 = 0 to 100% Rated Output	
Reference Voltage (V_{REF})	Temperature +25°C, V05 Option	+5 ± 0.5%	VDC
	Temperature +25°C, V10 Option	+10 ± 0.5%	
Enable/Disable HV_{OUT}	-	Unconnected = Disabled; Ground to +0.5 = Disabled; +2.4 to 32 = Enabled	VDC
Mode Indicator	IMODE	Open Drain, Pulled Low When Active, 0 to 60V and 100mA Max	-
	VMODE	Open Drain, Pulled Low When Active, 0 to 60V and 100mA Max	

Pin Assignments & Connections ⁶		
Pin 1,8	PWRGND	Input Power Ground Return
Pin 2,9	+VIN	Positive Power Input
Pin 3	IMON	Output Current Monitor
Pin 4	ENABLE	Enable/Disable
Pin 5	SIGGND	Signal Ground Return
Pin 6	VADJ	Voltage Adjust
Pin 7	VREF	Voltage Reference
Pin 10	N/C	N/C
Pin 11	IMODE	Current Mode Indicator
Pin 12	VMODE	Voltage Mode Indicator
Pin 13	IADJ	Current Adjust
Pin 14	VMON	Output Voltage Monitor
Pin 15, 16	HVRTN	High Voltage Ground Return
Pin 17, 18	HVOUT	High Voltage Output

⁶Pin Assignments applicable to both sides of the power supply.

Certifications and Compliances

