



TY2 SERIES (Y5P)

100 to 6800pF, 3 to 20kV
High Voltage Ceramic Capacitors



Features

- Radial Leaded Package
- Y5P Temperature Characteristics

Specifications

Part Number	Value									
	C Typical Cap. (pF)	Tolerance (±%)	V _{RATED} Max. Rated Voltage (kVDC)	V _{WITHSTAND} Dielectric Withstand Voltage (kVDC)	D Max. Dia. (mm)	H Max. Height (mm)	T Max. Thickness (mm)	L Min. Lead Length (mm)	Ls Max. Lead Spacing (mm) ±1.5mm tolerance	d Typical Lead Dia. (mm)
TY2Y5P101•3KV	100	K,M,Z	3.0	4.5	8.0	11.0	4.5	25.0	7.5	0.6
TY2Y5P151•3KV	150	K,M,Z	3.0	4.5	8.0	11.0	4.5	25.0	7.5	0.6
TY2Y5P221•3KV	220	K,M,Z	3.0	4.5	8.0	11.0	4.5	25.0	7.5	0.6
TY2Y5P331•3KV	330	K,M,Z	3.0	4.5	8.0	11.0	4.5	25.0	7.5	0.6
TY2Y5P471•3KV	470	K,M,Z	3.0	4.5	8.0	11.0	4.5	25.0	7.5	0.6
TY2Y5P561•3KV	560	K,M,Z	3.0	4.5	9.0	12.0	4.5	25.0	7.5	0.6
TY2Y5P681•3KV	680	K,M,Z	3.0	4.5	9.0	12.0	4.5	25.0	7.5	0.6
TY2Y5P821•3KV	820	K,M,Z	3.0	4.5	10.0	13.0	4.5	25.0	7.5	0.6
TY2Y5P102•3KV	1000	K,M,Z	3.0	4.5	10.0	13.0	4.5	25.0	7.5	0.6
TY2Y5P152•3KV	1500	K,M,Z	3.0	4.5	12.0	15.0	4.5	25.0	7.5	0.6
TY2Y5P222•3KV	2200	K,M,Z	3.0	4.5	13.0	16.0	4.5	25.0	7.5	0.6
TY2Y5P272•3KV	2700	K,M,Z	3.0	4.5	15.0	18.0	4.5	25.0	7.5	0.6
TY2Y5P332•3KV	3300	K,M,Z	3.0	4.5	16.0	19.0	4.5	25.0	7.5	0.6
TY2Y5P472•3KV	4700	K,M,Z	3.0	4.5	21.0	24.0	4.5	25.0	7.5	0.6
TY2Y5P682•3KV	6800	K,M,Z	3.0	4.5	22.0	25.0	4.5	25.0	7.5	0.7
TY2Y5P101•4KV	100	K,M,Z	4.0	6.0	8.0	11.0	5.0	25.0	10.0	0.6
TY2Y5P151•4KV	150	K,M,Z	4.0	6.0	8.0	11.0	5.0	25.0	10.0	0.6
TY2Y5P221•4KV	220	K,M,Z	4.0	6.0	8.0	11.0	5.0	25.0	10.0	0.6
TY2Y5P331•4KV	330	K,M,Z	4.0	6.0	8.0	11.0	5.0	25.0	10.0	0.6
TY2Y5P471•4KV	470	K,M,Z	4.0	6.0	9.0	12.0	5.0	25.0	10.0	0.6
TY2Y5P561•4KV	560	K,M,Z	4.0	6.0	9.0	12.0	5.0	25.0	10.0	0.6
TY2Y5P681•4KV	680	K,M,Z	4.0	6.0	10.0	13.0	5.0	25.0	10.0	0.6
TY2Y5P821•4KV	820	K,M,Z	4.0	6.0	10.0	13.0	5.0	25.0	10.0	0.6
TY2Y5P102•4KV	1000	K,M,Z	4.0	6.0	11.0	14.0	5.0	25.0	10.0	0.6
TY2Y5P152•4KV	1500	K,M,Z	4.0	6.0	13.0	16.0	5.0	25.0	10.0	0.6
TY2Y5P222•4KV	2200	K,M,Z	4.0	6.0	15.0	18.0	5.0	25.0	10.0	0.6
TY2Y5P272•4KV	2700	K,M,Z	4.0	6.0	17.0	20.0	5.0	25.0	10.0	0.6
TY2Y5P332•4KV	3300	K,M,Z	4.0	6.0	18.0	21.0	5.0	25.0	10.0	0.6
TY2Y5P472•4KV	4700	K,M,Z	4.0	6.0	20.0	23.0	5.5	25.0	10.0	0.7
TY2Y5P682•4KV	6800	K,M,Z	4.0	6.0	24.0	27.0	5.5	25.0	10.0	0.7
TY2Y5P101•5KV	100	K,M,Z	5.0	7.5	8.0	11.0	5.5	25.0	10.0	0.6
TY2Y5P151•5KV	150	K,M,Z	5.0	7.5	8.0	11.0	5.5	25.0	10.0	0.6
TY2Y5P221•5KV	220	K,M,Z	5.0	7.5	8.0	11.0	5.5	25.0	10.0	0.6
TY2Y5P331•5KV	330	K,M,Z	5.0	7.5	9.0	12.0	5.5	25.0	10.0	0.6
TY2Y5P471•5KV	470	K,M,Z	5.0	7.5	9.0	12.0	5.5	25.0	10.0	0.6



TY2 SERIES (Y5P)

Part Number	Value									
	C Typical Cap. (pF)	Tolerance (±%)	V _{RATED} Max. Rated Voltage (kVDC)	V _{WITHSTAND} Dielectric Withstand Voltage (kVDC)	D Max. Dia. (mm)	H Max. Height (mm)	T Max. Thickness (mm)	L Min. Lead Length (mm)	Ls Max. Lead Spacing (mm) ±1.5mm tolerance	d Typical Lead Dia. (mm)
TY2Y5P561•5KV	560	K,M,Z	5.0	7.5	10.0	13.0	5.5	25.0	10.0	0.6
TY2Y5P681•5KV	680	K,M,Z	5.0	7.5	10.0	14.0	5.5	25.0	10.0	0.6
TY2Y5P821•5KV	820	K,M,Z	5.0	7.5	11.0	15.0	5.5	25.0	10.0	0.6
TY2Y5P102•5KV	1000	K,M,Z	5.0	7.5	12.0	18.0	5.5	25.0	10.0	0.6
TY2Y5P152•5KV	1500	K,M,Z	5.0	7.5	15.0	20.0	5.5	25.0	10.0	0.6
TY2Y5P182•5KV	1800	K,M,Z	5.0	7.5	15.0	18.0	5.5	25.0	10.0	0.6
TY2Y5P222•5KV	2200	K,M,Z	5.0	7.5	17.0	20.0	5.5	25.0	10.0	0.6
TY2Y5P272•5KV	2700	K,M,Z	5.0	7.5	18.0	22.0	5.5	25.0	10.0	0.6
TY2Y5P332•5KV	3300	K,M,Z	5.0	7.5	20.0	23.0	6.0	25.0	10.0	0.7
TY2Y5P472•5KV	4700	K,M,Z	5.0	7.5	23.0	26.0	6.0	25.0	10.0	0.7
TY2Y5P682•5KV	6800	K,M,Z	5.0	7.5	27.0	31.0	6.0	25.0	10.0	0.7
TY2Y5P101•6KV	100	K,M,Z	6.0	9.0	8.0	11.0	7.0	25.0	10.0	0.6
TY2Y5P151•6KV	150	K,M,Z	6.0	9.0	8.0	11.0	7.0	25.0	10.0	0.6
TY2Y5P221•6KV	220	K,M,Z	6.0	9.0	8.0	11.0	7.0	25.0	10.0	0.6
TY2Y5P331•6KV	330	K,M,Z	6.0	9.0	9.0	12.0	7.0	25.0	10.0	0.6
TY2Y5P471•6KV	470	K,M,Z	6.0	9.0	10.0	13.0	7.0	25.0	10.0	0.6
TY2Y5P561•6KV	560	K,M,Z	6.0	9.0	11.0	14.0	7.0	25.0	10.0	0.6
TY2Y5P681•6KV	680	K,M,Z	6.0	9.0	12.0	15.0	7.0	25.0	10.0	0.6
TY2Y5P821•6KV	820	K,M,Z	6.0	9.0	12.0	15.0	7.0	25.0	10.0	0.6
TY2Y5P102•6KV	1000	K,M,Z	6.0	9.0	13.0	16.0	7.0	25.0	10.0	0.6
TY2Y5P152•6KV	1500	K,M,Z	6.0	9.0	15.0	18.0	7.0	25.0	10.0	0.6
TY2Y5P202•6KV	2000	K,M,Z	6.0	9.0	17.0	20.0	7.0	25.0	10.0	0.6
TY2Y5P222•6KV	2200	K,M,Z	6.0	9.0	18.0	22.0	7.0	25.0	10.0	0.6
TY2Y5P242•6KV	2400	K,M,Z	6.0	9.0	18.0	21.0	7.0	25.0	10.0	0.65
TY2Y5P272•6KV	2700	K,M,Z	6.0	9.0	19.0	23.0	7.0	25.0	10.0	0.6
TY2Y5P332•6KV	3300	K,M,Z	6.0	9.0	21.0	25.0	7.5	25.0	10.0	0.7
TY2Y5P472•6KV	4700	K,M,Z	6.0	9.0	25.0	29.0	7.5	25.0	10.0	0.7
TY2Y5P101•8KV	100	K,M,Z	8.0	12.0	8.0	11.0	7.5	25.0	10.0	0.6
TY2Y5P151•8KV	150	K,M,Z	8.0	12.0	8.0	11.0	7.5	25.0	10.0	0.6
TY2Y5P221•8KV	220	K,M,Z	8.0	12.0	9.0	12.0	7.5	25.0	10.0	0.6
TY2Y5P331•8KV	330	K,M,Z	8.0	12.0	10.0	13.0	7.5	25.0	10.0	0.6
TY2Y5P471•8KV	470	K,M,Z	8.0	12.0	11.0	14.0	7.5	25.0	10.0	0.6
TY2Y5P561•8KV	560	K,M,Z	8.0	12.0	12.0	15.0	7.5	25.0	10.0	0.6
TY2Y5P681•8KV	680	K,M,Z	8.0	12.0	12.0	15.0	7.5	25.0	10.0	0.6
TY2Y5P821•8KV	820	K,M,Z	8.0	12.0	13.0	16.0	7.5	25.0	10.0	0.6
TY2Y5P102•8KV	1000	K,M,Z	8.0	12.0	14.0	17.0	7.5	25.0	10.0	0.6
TY2Y5P152•8KV	1500	K,M,Z	8.0	12.0	17.0	20.0	8.0	25.0	10.0	0.6
TY2Y5P222•8KV	2200	K,M,Z	8.0	12.0	19.0	22.0	8.0	25.0	10.0	0.6
TY2Y5P272•8KV	2700	K,M,Z	8.0	12.0	21.0	25.0	8.0	25.0	10.0	0.6
TY2Y5P332•8KV	3300	K,M,Z	8.0	12.0	23.0	27.0	8.0	25.0	10.0	0.7
TY2Y5P472•8KV	4700	K,M,Z	8.0	12.0	27.0	31.0	8.0	25.0	10.0	0.7
TY2Y5P101•10KV	100	K,M,Z	10.0	15.0	9.0	12.0	8.0	25.0	10.0	0.6
TY2Y5P151•10KV	150	K,M,Z	10.0	15.0	9.0	12.0	8.0	25.0	10.0	0.6



TY2 SERIES (Y5P)

Part Number	Value									
	C Typical Cap. (pF)	Tolerance (±%)	V _{RATED} Max. Rated Voltage (kVDC)	V _{WITHSTAND} Dielectric Withstand Voltage (kVDC)	D Max. Dia. (mm)	H Max. Height (mm)	T Max. Thickness (mm)	L Min. Lead Length (mm)	Ls Max. Lead Spacing (mm) <i>±1.5mm tolerance</i>	d Typical Lead Dia. (mm)
TY2Y5P221•10KV	220	K,M,Z	10.0	15.0	9.0	12.0	8.0	25.0	10.0	0.6
TY2Y5P331•10KV	330	K,M,Z	10.0	15.0	10.0	13.0	8.0	25.0	10.0	0.6
TY2Y5P471•10KV	470	K,M,Z	10.0	15.0	11.0	14.0	8.0	25.0	10.0	0.6
TY2Y5P561•10KV	560	K,M,Z	10.0	15.0	12.0	15.0	8.0	25.0	10.0	0.6
TY2Y5P681•10KV	680	K,M,Z	10.0	15.0	13.0	16.0	8.0	25.0	10.0	0.6
TY2Y5P821•10KV	820	K,M,Z	10.0	15.0	14.0	17.0	8.0	25.0	10.0	0.6
TY2Y5P102•10KV	1000	K,M,Z	10.0	15.0	15.0	18.0	8.0	25.0	10.0	0.6
TY2Y5P152•10KV	1500	K,M,Z	10.0	15.0	18.0	21.0	8.0	25.0	10.0	0.6
TY2Y5P202•10KV	2000	K,M,Z	10.0	15.0	21.0	25.0	7.0	25.0	15.0	0.8
TY2Y5P222•10KV	2200	K,M,Z	10.0	15.0	21.0	25.0	8.5	25.0	10.0	0.7
TY2Y5P242•10KV	2400	K,M,Z	10.0	15.0	20.0	24.0	8.0	25.0	10.0	0.7
TY2Y5P272•10KV	2700	K,M,Z	10.0	15.0	24.0	28.0	8.5	25.0	10.0	0.7
TY2Y5P332•10KV	3300	K,M,Z	10.0	15.0	26.0	30.0	8.5	25.0	10.0	0.7
TY2Y5P472•10KV	4700	K,M,Z	10.0	15.0	30.0	34.0	8.5	25.0	12.5	0.7
TY2Y5P101•12KV	100	K,M,Z	12.0	18.0	8.0	12.0	8.5	25.0	12.5	0.7
TY2Y5P151•12KV	150	K,M,Z	12.0	18.0	9.0	13.0	8.5	25.0	12.5	0.7
TY2Y5P221•12KV	220	K,M,Z	12.0	18.0	10.0	14.0	8.5	25.0	12.5	0.7
TY2Y5P331•12KV	330	K,M,Z	12.0	18.0	11.0	15.0	8.5	25.0	12.5	0.7
TY2Y5P471•12KV	470	K,M,Z	12.0	18.0	12.0	16.0	8.5	25.0	12.5	0.7
TY2Y5P561•12KV	560	K,M,Z	12.0	18.0	13.0	17.0	8.5	25.0	12.5	0.7
TY2Y5P681•12KV	680	K,M,Z	12.0	18.0	14.0	18.0	8.5	25.0	12.5	0.7
TY2Y5P821•12KV	820	K,M,Z	12.0	18.0	15.0	19.0	8.5	25.0	12.5	0.7
TY2Y5P102•12KV	1000	K,M,Z	12.0	18.0	17.0	21.0	8.5	25.0	12.5	0.7
TY2Y5P152•12KV	1500	K,M,Z	12.0	18.0	20.0	24.0	9.0	25.0	12.5	0.7
TY2Y5P222•12KV	2200	K,M,Z	12.0	18.0	23.0	27.0	9.0	25.0	12.5	0.7
TY2Y5P272•12KV	2700	K,M,Z	12.0	18.0	25.0	29.0	9.0	25.0	12.5	0.7
TY2Y5P332•12KV	3300	K,M,Z	12.0	18.0	28.0	32.0	9.0	25.0	12.5	0.7
TY2Y5P101•15KV	100	K,M,Z	15.0	22.5	8.0	12.0	9.0	25.0	12.5	0.7
TY2Y5P151•15KV	150	K,M,Z	15.0	22.5	9.0	13.0	9.0	25.0	12.5	0.7
TY2Y5P221•15KV	220	K,M,Z	15.0	22.5	11.0	15.0	9.0	25.0	12.5	0.7
TY2Y5P331•15KV	330	K,M,Z	15.0	22.5	12.0	16.0	9.0	25.0	12.5	0.7
TY2Y5P471•15KV	470	K,M,Z	15.0	22.5	13.0	17.0	9.0	25.0	12.5	0.7
TY2Y5P561•15KV	560	K,M,Z	15.0	22.5	14.0	18.0	9.0	25.0	12.5	0.7
TY2Y5P681•15KV	680	K,M,Z	15.0	22.5	15.0	19.0	9.0	25.0	12.5	0.7
TY2Y5P821•15KV	820	K,M,Z	15.0	22.5	17.0	21.0	9.0	25.0	12.5	0.7
TY2Y5P102•15KV	1000	K,M,Z	15.0	22.5	18.5	21.5	9.0	25.0	12.5	0.7
TY2Y5P152•15KV	1500	K,M,Z	15.0	22.5	21.0	25.0	10.0	25.0	12.5	0.7
TY2Y5P202•15KV	2000	K,M,Z	15.0	22.5	25.0	30.0	10.0	25.0	12.5	0.7
TY2Y5P222•15KV	2200	K,M,Z	15.0	22.5	24.0	28.0	10.0	25.0	12.5	0.7
TY2Y5P242•15KV	2400	K,M,Z	15.0	22.5	26.0	30.0	10.0	25.0	12.5	0.7
TY2Y5P272•15KV	2700	K,M,Z	15.0	22.5	28.0	32.0	10.0	25.0	12.5	0.7
TY2Y5P101•20KV	100	K,M,Z	20.0	30.0	9.0	13.0	11.0	25.0	12.5	0.7
TY2Y5P151•20KV	150	K,M,Z	20.0	30.0	10.0	14.0	11.0	25.0	12.5	0.7




TY2 SERIES (Y5P)


Part Number	Value									
	C Typical Cap. (pF)	Tolerance (±%)	V _{RATED} Max. Rated Voltage (kVDC)	V _{WITHSTAND} Dielectric Withstand Voltage (kVDC)	D Max. Dia. (mm)	H Max. Height (mm)	T Max. Thickness (mm)	L Min. Lead Length (mm)	Ls Max. Lead Spacing (mm) ±1.5mm tolerance	d Typical Lead Dia. (mm)
TY2Y5P221•20KV	220	K,M,Z	20.0	30.0	12.0	16.0	11.0	25.0	12.5	0.7
TY2Y5P331•20KV	330	K,M,Z	20.0	30.0	14.0	18.0	11.0	25.0	12.5	0.7
TY2Y5P471•20KV	470	K,M,Z	20.0	30.0	15.0	19.0	11.0	25.0	12.5	0.7
TY2Y5P561•20KV	560	K,M,Z	20.0	30.0	16.0	20.0	11.0	25.0	12.5	0.7
TY2Y5P681•20KV	680	K,M,Z	20.0	30.0	18.0	22.0	11.0	25.0	12.5	0.7
TY2Y5P821•20KV	820	K,M,Z	20.0	30.0	19.0	23.0	11.0	25.0	12.5	0.7
TY2Y5P102•20KV	1000	K,M,Z	20.0	30.0	20.0	24.0	12.0	25.0	12.5	0.8
TY2Y5P152•20KV	1500	K,M,Z	20.0	30.0	25.0	29.0	12.0	25.0	12.5	0.8
TY2Y5P222•20KV	2200	K,M,Z	20.0	30.0	29.0	35.0	13.0	25.0	12.5	0.7
TY2Y5P332•20KV	3300	K,M,Z	20.0	30.0	38.0	48.0	13.0	25.0	12.5	0.7

Note: TY2Y5P models are offered with K (± 10%), M (± 20%), and Z (+80%, -20%) capacitance tolerances. Substitute the “*” in the part number with the preferred tolerance. Inquire for additional information.

Drawings and Characteristics

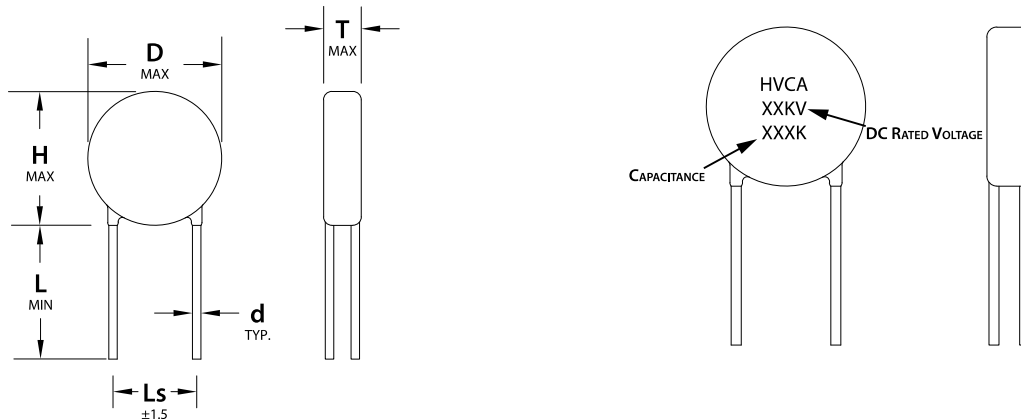


Y5P TYPICAL VOLTAGE CHARACTERISTICS CURVE

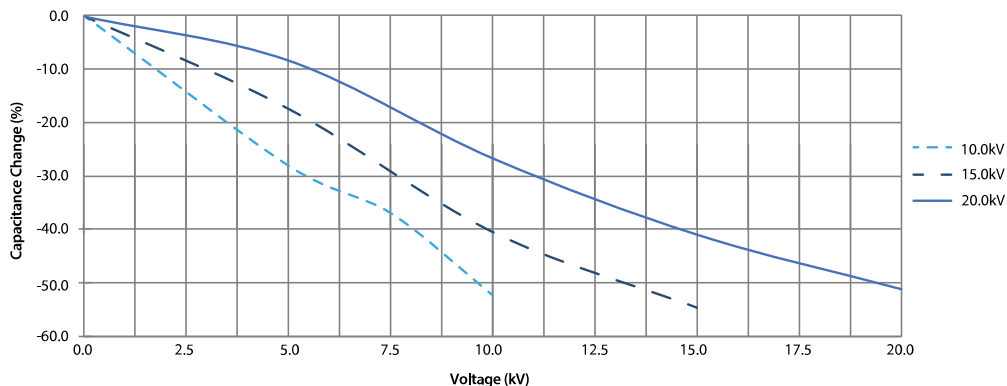




TY2 SERIES (Y5P)

Y5P TYPICAL TEMPERATURE CHARACTERISTICS CURVE

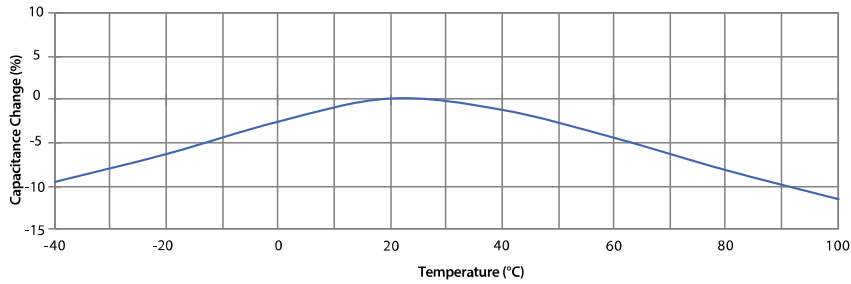

Part Number Decoder:

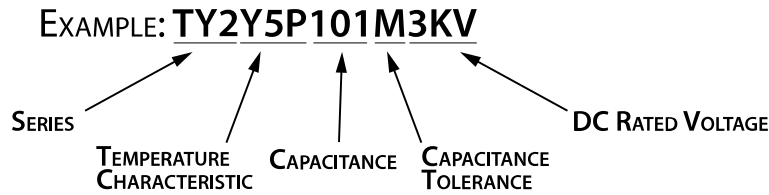

Capacitance Decoder:

For capacitance values 100pF and higher, the first and second digits are significant digits, while the third digit expresses the number of zeros to follow the two significant digits. For example, 152 = 1500pF, since the 1 and the 5 are the significant digits with 2 zeros that follow.

For capacitance values less than 10pF, digits before the "R" are significant digits, while digits after the "R" are the decimal values after the significant digits. For example, 4R7 = 4.7pF, since the 4 is the significant digit while the 7 is the digit after the decimal.

Additional Specifications		
TOP	Operating Temperature Range	-25 to +100°C
TC	Temperature Coefficient	-25 to +85°C
DF	Dissipation Factor	2.5% Max



Note: Specifications subject to change without notice. Photo is representation only.